



Versions

High Capacity Freezer Refrigerator

Combo HCFRC18.01P R290



PATENT PENDING

Overview

- Upper Drawer (Freezer) Operating Temperature 0° to -10° for holding Frozen Product
- Lower Drawer (Refrigerator) Operating Temperature 34° to 40° for holding Refrigerated Product
- Patented Refrigeration design to reduce dehydration of refrigerated product
- Self-Closing Drawers
- Cartridge refrigeration system, removable for easy maintenance
- Zero Clearance Refrigeration
- Self-Defrosting



Certifications

H&K International
2200 Skyline Drive,
Mesquite, TX 75149
USA
Tel: +1 800-788-2445
Fax: +1 214-818-3596

H&K Equipment Ltd
1 Cosford Lane
Swift Valley
Rugby CV21 1QN
United Kingdom
Tel: +44 (0) 1788 554000
Fax: +44 (0) 1788 554100

H&K Manufacturing Ltd
Knockmitten House
Knockmitten Lane
Dublin 12
Republic of Ireland
Tel: +353 (1) 6055400
Fax: +353 (1) 6055466


Contact Info

www.hki.com


Base Refrigerator

Plans

PATENT PENDING

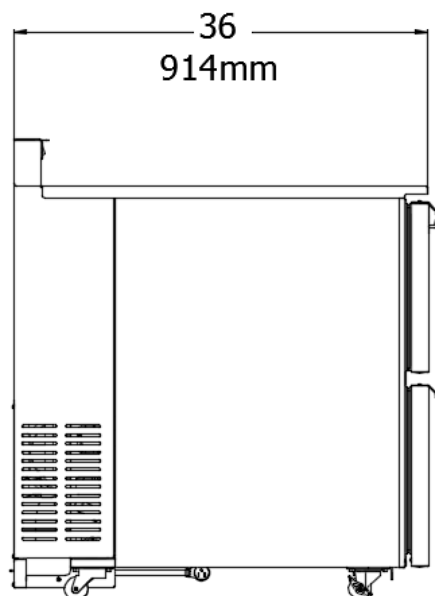

SIDE VIEW

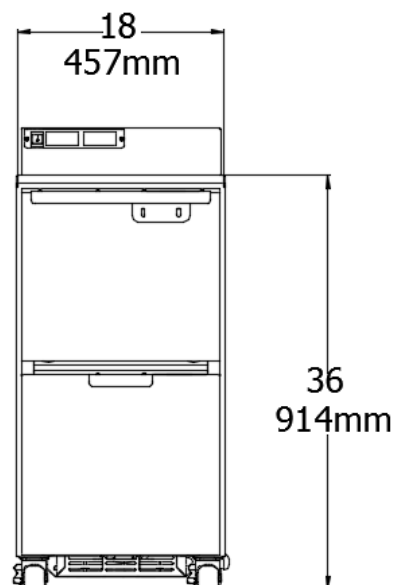

FRONT VIEW

Weights & Dimensions

in/lbs/ft³

mm/kg/L

Shipping

Weight	310	140
--------	-----	-----

Operational

Depth	36	914
Width	18	457
Height	36	914
Capacity	3.53 ft ³	100
Drawer Size-Top	12.75W x 23.25 D x 10.5 H	324W x 590 D x 267 H
Drawer Size-Bottom	12.75W x 21.25 D x 10.5 H	324W x 540 D x 267 H
Weight	280	127
Clearance(Side/Top/Back)	0	0

Electrical & Mechanical

US/Canada/LATAM

AOW

Japan

Voltage/Phase/Frequency	120/1/60	230/1/50	XXX/x/XX
Amps	5.9	3.32	XX.xx
Material (Ext./Int./Doors&Lids)	SS/SS/SS		
Operating Temp (Refrig) (Freezer)	(32°F - 41°F 0°C - 5°C) , (-3° / -7°F, -20°C / -21°C)		
Refrigerant	R290 4.1oz (0.116kg)		
Plug/Cord Type	by market, 9'-0" (2.1 m) (230v) 10'-0 (120v)		
Controls	Digital, Self Defrosting		



H&K International
Restaurant Equipment Systems Worldwide

www.hki.com
1.800.859.2445