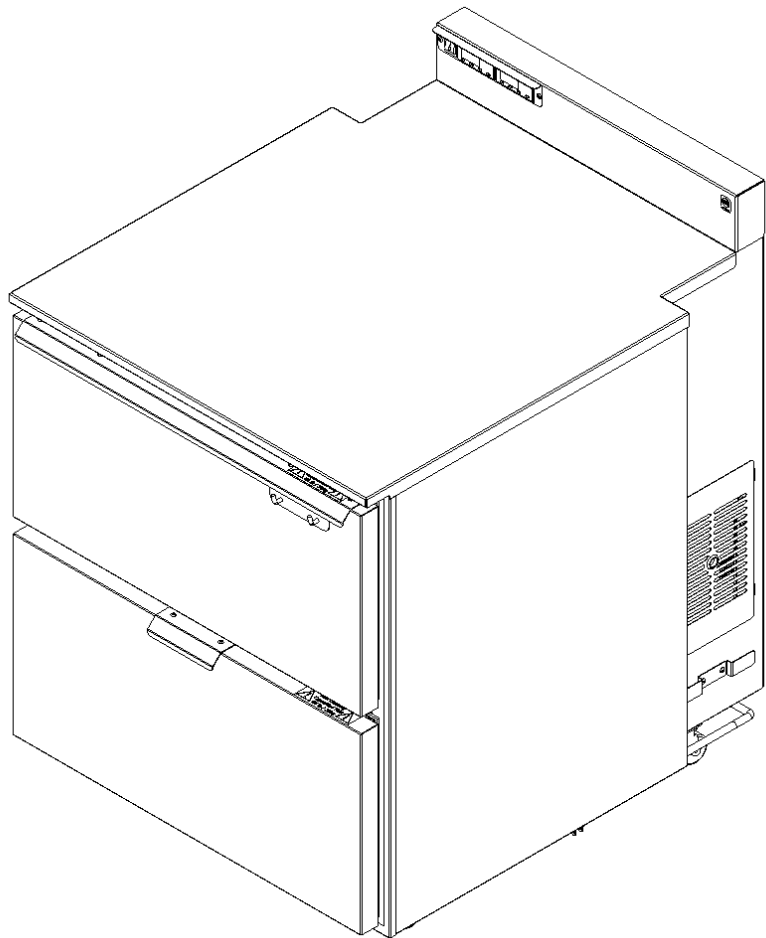


## H&amp;K International

## High Capacity Propane Freezer-Refrigerator Combo (HCFRC)

**Weekly maintenance tasks**

RF 10 W01 Clean Unit

**Quarterly maintenance tasks**RF 10 Q01 Clean Condenser  
Coil & Check  
Door Gasket**△ Hazards**

These icons alert you to a possible risk of personal injury.

**▨ Equipment alerts**

Look for this icon to find information about how to avoid damaging the equipment while doing a procedure.

**★ Tips**

Look for this icon to find helpful tips about how to do a procedure.

## Clean Unit

Weekly

RF 10 W01

|                      |                                                                                               |                                             |
|----------------------|-----------------------------------------------------------------------------------------------|---------------------------------------------|
| <b>Why</b>           | The unit must be cleaned weekly to ensure proper operation.                                   |                                             |
| <b>Time required</b> | 5 minutes to prepare                                                                          | 15 minutes to complete                      |
| <b>Time of day</b>   | Evening after closing                                                                         | For 24-hour restaurants: during slow period |
| <b>Hazard icons</b>  |  Electricity |                                             |

Tools and supplies      Soft bristled brush



- 1 Turn off unit**  
Press and hold right lower button of controller for 5 seconds to turn off the unit.



- 4 Wipe down Inside of Drawers**  
Wipe down inside of drawers with a towel and sanitizing solution.



- 2 Remove items from unit**  
Place remaining items into walk-in cooler while cleaning unit.



- 5 Turn on unit**  
Press and hold right lower button of controller for 5 seconds to turn on the unit. Allow to reach operating temperature.



- 3 Remove dividers**  
Wash in sink with mild soap and sanitize with a solution of McD Sanitizer (HCS). Allow accessories to air dry.



- 6 Re-fill unit with products**  
Re-fill the unit with the items from the walk-in cooler.



## Clean Condenser Coil &amp; Check Drawer Gaskets

Quarterly

RF 10 Q01

|                      |                                                                                                                                                                                                                                                                                                                                 |                                             |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|
| <b>Why</b>           | The condenser coil must be cleaned regularly to ensure the unit operates at peak performance. The drawer gaskets condition must be check to ensure the unit is sealed properly. Failure to do so could result in food product quality risks, premature refrigeration failure, additional energy usage, and voiding of warranty. |                                             |
| <b>Time required</b> | 10 minutes to prepare                                                                                                                                                                                                                                                                                                           | 15 minutes to complete                      |
| <b>Time of day</b>   | Evening after closing                                                                                                                                                                                                                                                                                                           | For 24-hour restaurants: during slow period |
| <b>Hazard icons</b>  |  Electricity                                                                                                                                                                                                                                   |                                             |

## Tools and supplies

Soft bristled brush

**1 Turn off unit**

Press and hold right lower button of controller for 5 seconds to turn off the unit.

**4 Replace slotted panel**

Reinstall panel by aligning tabs with slots on each side of condenser housing. Push panel in and down until secure.



**Tip**  
Make sure to check that the panel is tightly secured.

**2 Remove slotted panel**

Lift panel up to clear tabs at each side of panel.

**5 Check Drawer gaskets**

Check to see if door gasket broken. If the door gasket is broken, and cannot seal the cabinet properly, please call **800-521-3987** to order replacement gasket.

**3 Clean Condenser Coil**

Using a soft bristled brush remove any dirt present on the coil.



**Tip**  
Make sure to brush with the direction of the fins.

**6 Turn on unit**

Press and hold right lower button of controller for 5 seconds to turn on the unit.



Electricity

