

HEATED LANDING STATION

WITH BUILT-IN LOAD CENTER



18013137 Shown



Franke Foodservice Solutions Inc
800 Aviation Parkway
Smyrna, TN 37167
Tel +1-877-379-3769
franke.com

Item #:

Project:

Quantity:

MODEL NUMBER

- ☐ 18011980 HLS with Load Center, Bag & Tray Storage
- ☐ 18013137 HLS with Load Center, Bag & Cup Storage

PRODUCT OVERVIEW

Heated Landing Station with incorporated load center replaces existing HLZ Center Island with load center and is designed for remodel applications only. 48" wide, all-stainless steel base cabinet with black anodized heated landing surface & powder-coated overself. Rigid vertical chase facilitates all utility routing & mounting brackets for POS monitors. Unit can be configured for two or three sided operation with access to condiments & bags at each side. Modular construction allows future reconfiguration with common tools. Four 6" legs with flanged feet provide stability and 3" height adjustment capability.

STANDARD PRODUCT FEATURES

- Heated product landing surface captures and keeps prepared items warm
- Provides 90% energy savings compared to previous models
- Designed for both two- and three-sided applications
- Modular design facilitates flexibility for cost effective configuration changes to accommodate demands of future products
- Chase provides safe, secure routing of power & data cables for POS
- Includes 3-phase, 125 amp load center to power HLS and prep line equipment
- Optional 6-place cup dispenser system module available

Approval _____

*Make
it
Wonderful*






HEATED LANDING STATION WITH BUILT-IN LOAD CENTER

18013137 SHOWN

FRONT VIEW

SIDE VIEW

TOP VIEW

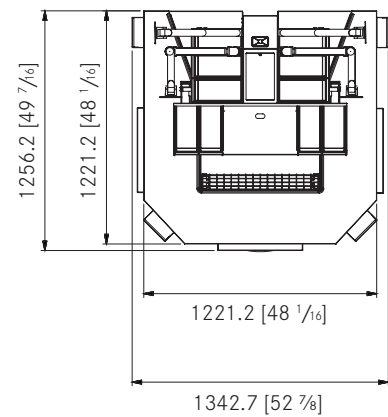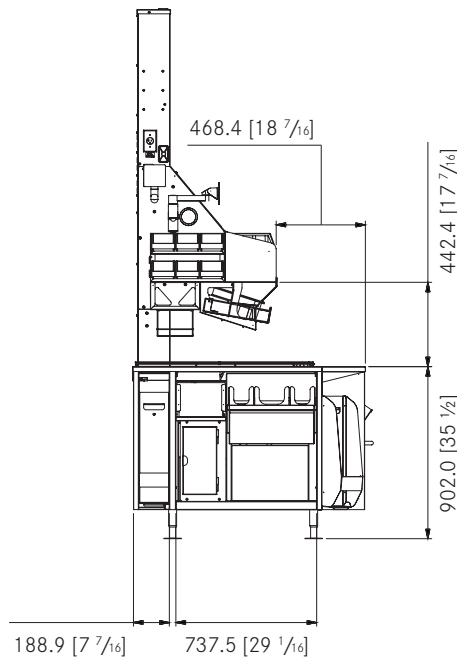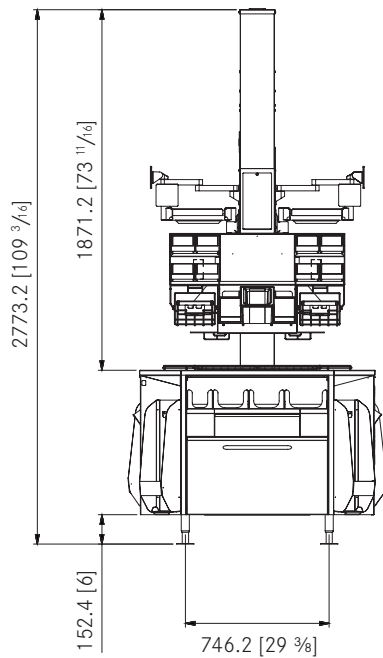

DIMENSIONS

18011980

Width	52.88"	1342.7 mm
Depth	49.46"	1256.2 mm
Height	109.18"	2773.2 mm

18013137

Width	52.88"	1342.7 mm
Depth	49.46"	1256.2 mm
Height	109.18"	2773.2 mm

MISCELLANEOUS

Listed receptacles are NOT powered by individual feeds from store main breaker panel. Heated Landing Stations are equipped with load center that feeds individual circuits. Carefully review electrical specifications (right) prior to equipment installation.

ELECTRICAL

HLS LOAD CENTER

Voltage/Frequency/Phase	208V/50-60Hz/3Ph
Amp Load	125 Amp

HLS ELECTRICAL RECEPTACLES

Circuit	Voltage	Amperage	Plug
UHCs (2)	208V	20 Amp	Safety Twist-Lock
Prep Table (2)	120V	20 Amp	Safety Twist-Lock
Landing Surface (1)	120V	20 Amp	Straight Blade Duplex
UHC (1)	208V	20 Amp	Pin & Sleeve
Pie Merchandiser (1)	125V	20 Amp	Straight Blade Single
POS (6)	125V	15 Amp	Twist-Lock Isolated/Grounded

RECYCLE DOCUMENTS AND EQUIPMENT RESPONSIBLY

© 2018 Franke Foodservice Solutions, Inc. This media is the confidential and proprietary property of Franke Foodservice Solutions, Inc. and shall not be reproduced in any form of media without the express written permission of a Franke representative. Due to continuous product development, Franke reserves the right to make changes in design and specifications without prior notice. Under license Franke Technology and Trademark Ltd., Switzerland. Printed in USA. Document Part # 19010826, Rev. A, December 3, 2018

Make it Wonderful

FRANKE